




PIX

Power Transmission Solutions

Driving growth!

PIX-Terminator®

Heavy-duty, High-power, Aramid-cord, Wrap Belts

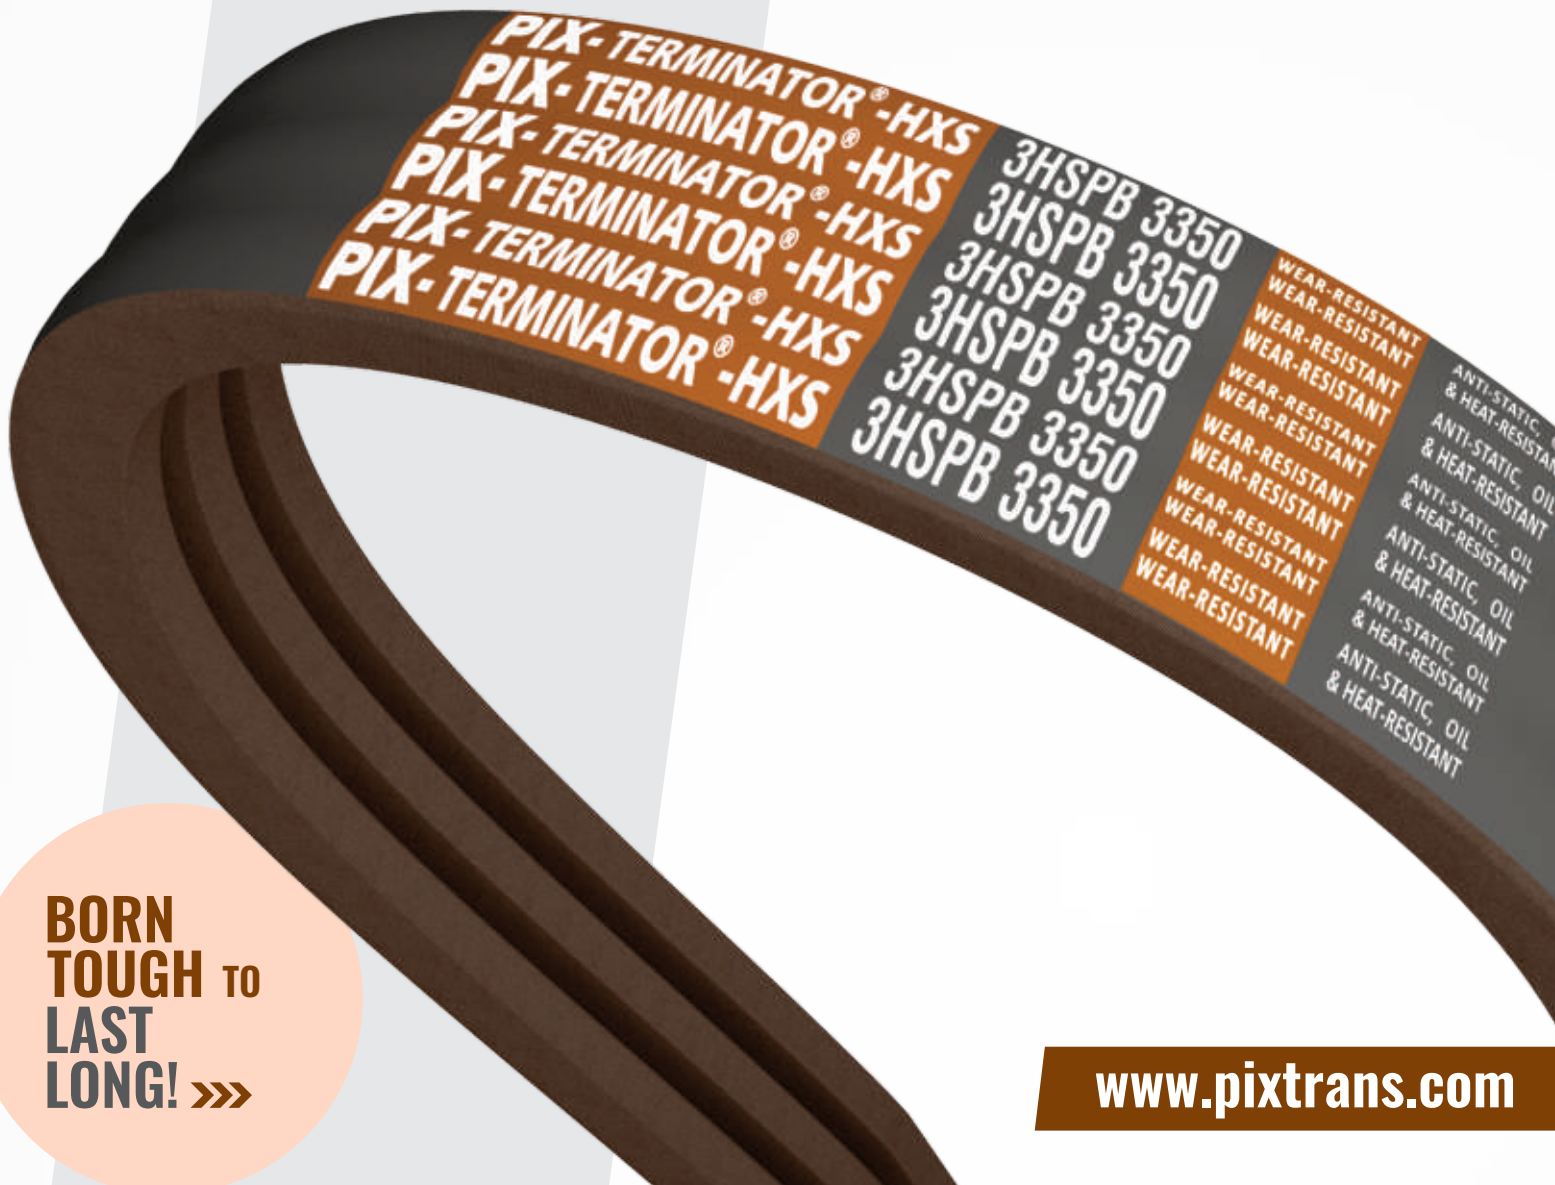

**BORN
TOUGH TO
LAST
LONG! >>>**

www.pixtrans.com

PIX-Terminator[®]

Heavy-duty, High-power, Aramid-cord, Wrap Belts


PIX-Terminator[®] Belts are designed for heavy-duty, high-power, and excessive wear-and-tear applications with the toughest possible operating conditions such as crushers, surface miners, wood-chippers, and ball-mills among others.

PIX-Terminator[®] Belts offer superior power transmission capacity over standard Belts and exhibit excellent durability, strength, abrasion and wear-resistance.

PIX-Terminator[®] Belts are recommended for:



- › Drives where high power transmission is necessary
- › Applications involving severe shock-loads, extreme working conditions
- › Drives with space constraints
- › Drives with high ambient temperature conditions

Construction

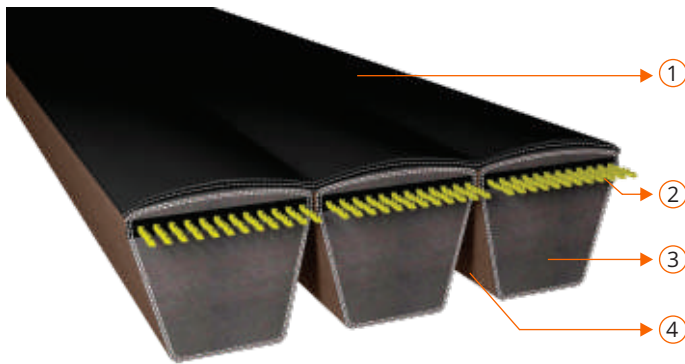

1. Curved-top profile offers excellent lateral rigidity and protects the Belt from severe shock-loads
2. Specially engineered high tensile-strength aramid cord provides excellent tensile strength and minimal Belt elongation
3. Specially designed base compound provides excellent modulus strength, facilitating enhanced power transmission
4. Non-rubberised, frictionless, unique outer fabric-wrap facilitates required slippage during operation, offers excellent flexibility, and reduces the sidewall wear

Lateral & Radial run-out test visuals

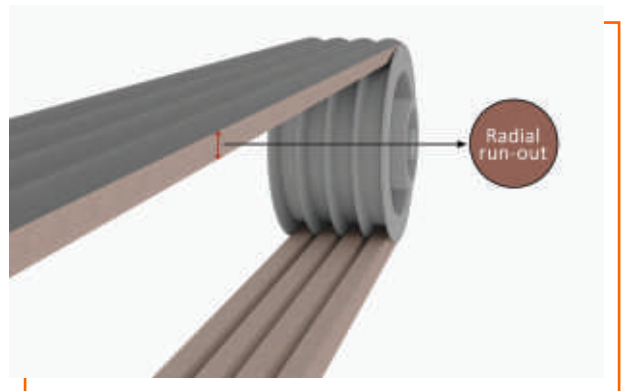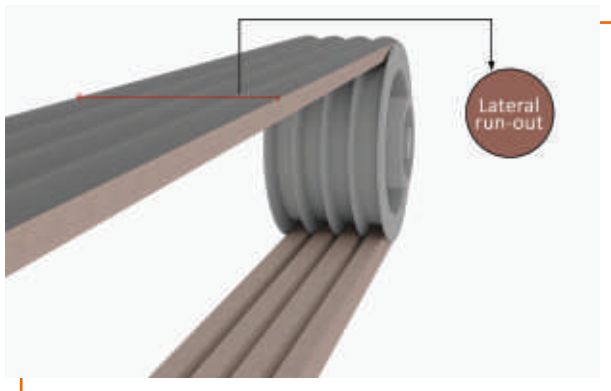

PIX-Terminator[®]

Heavy-duty, High-power, Aramid-cord, Wrap Belts


Features

- › Superior power transmission capacity up to 70% more than standard single Belts
- › Especially treated outer fabric reduces sidewall wear rate and offers enhanced flexibility
- › Highly controlled radial and lateral run-out facilitates smooth operation
- › Top curvature profile and special frictionless fabric enhance the heat dissipation rate
- › Special aramid cord for high tensile strength and minimum elongation
- › Specially engineered to exhibit excellent durability, strength, abrasion and wear-resistance
- › Best suited for heavy, shock and impulse load drives
- › Extended temperature range: -25°C to +100°C

PIX-Terminator[®]-HXS

Heavy-duty, High-power, Aramid-cord, Banded Wrap Belts

Product range



Section	Top width (mm)	Thickness (mm)	Angle (Degree)	Pitch (mm)	Mfg. Range		Unit of measurement	Length Designation
					Min.	Max.		
TR-HA	13.0	10.5	40	15.9	40	100	inch	Li
TR-HB	17.0	14.5	40	19.0	41	600	inch	Li
TR-HC	22.0	17.0	40	25.5	47	600	inch	Li
TR-HSPA	13.0	12.0	40	15.0	1000	2500	mm	Lp
TR-HSPB	17.0	17.0	40	19.0	2100	8000	mm	Lp
TR-HSPC	22.0	22.5	40	25.5	3000	11200	mm	Lp
TR-H5V	15.8	16.5	40	17.5	125	600	inch	La
TR-H8V	25.4	25.0	40	28.6	100	600	inch	La

PIX-Terminator[®]-XS

Heavy-duty, High-power, Aramid-cord, Wrap Belts

Product range



Section	Top width (mm)	Thickness (mm)	Angle (Degree)	Min. Pulley Dia. (mm)	Mfg. Range		Unit of measurement	Length Designation
					Min.	Max.		
TR-A	13.0	8.0	40	90	40	100	inch	Li
TR-B	17.0	11.0	40	112	80	300	inch	Li
TR-C	22.0	14.0	40	180	80	400	inch	Li
TR-SPA	13.0	10.0	40	90	1000	2540	mm	Lp
TR-SPB	17.0	14.0	40	140	1600	8000	mm	Lp
TR-SPC	22.0	18.0	40	224	2000	10000	mm	Lp
TR-3V	9.7	8.0	40	63	45	150	inch	La
TR-5V	15.8	14.0	40	140	80	400	inch	La
TR-8V	25.4	23.0	40	335	150	600	inch	La

Application


Vibrating screens, reclaimers, pulverisers, heavy-duty mixers, forestry woodcutters, wood-chippers, surface miners, stackers, stone crushers, jaw crushers, cone crushers, ball-mills, etc.

PIX-Terminator[®]


Heavy-duty, High-power, Aramid-cord, Wrap Belts

Test Results


Power rating

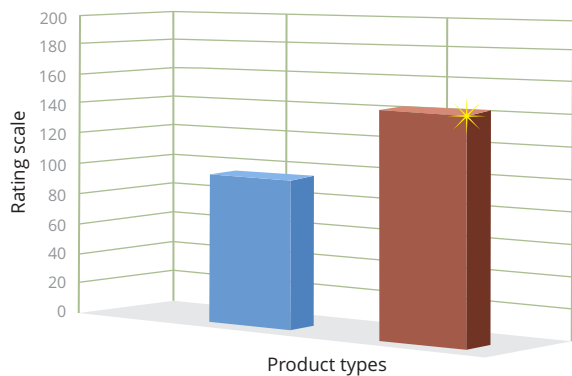


Product life rating

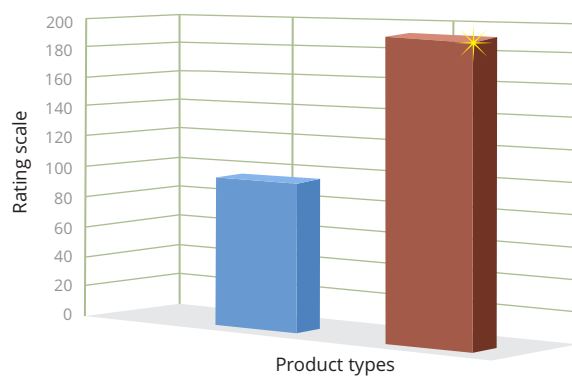


Slippage rating

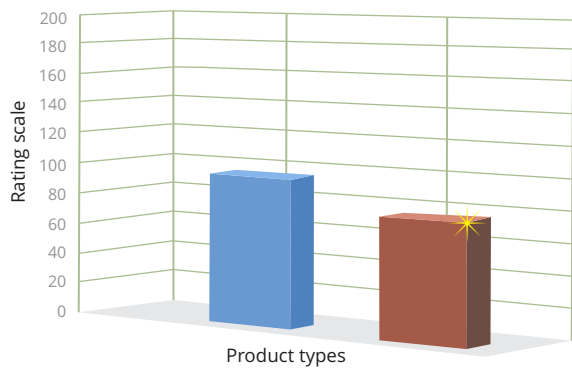

Heat dissipation rate

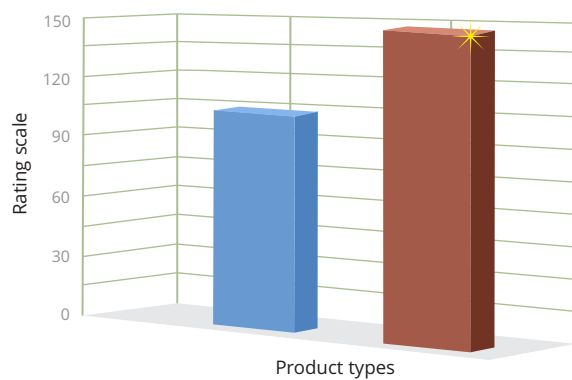

Tensile strength rating

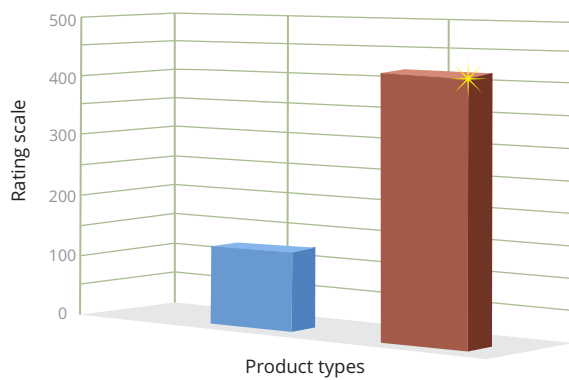

PIX-Terminator®-HXS


Product range - Banded Belts



HA		HA		HA		HA	
Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length
TR-HA 40	40	TR-HA 57	57	TR-HA 78	78	TR-HA 92	92
TR-HA 42	42	TR-HA 60	60	TR-HA 80	80	TR-HA 94	94
TR-HA 45	45	TR-HA 66	66	TR-HA 83	83	TR-HA 95	95
TR-HA 48	48	TR-HA 70	70	TR-HA 85	85	TR-HA 97	97
TR-HA 50	50	TR-HA 74	74	TR-HA 87	87	TR-HA 100	100
TR-HA 55	55	TR-HA 75	75	TR-HA 90	90		

Inside length in inch


Intermediate sizes are available upon request



HB		HB		HB		HB	
Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length
TR-HB 41	41	TR-HB 87	87	TR-HB 116	116	TR-HB 200	200
TR-HB 43	43	TR-HB 89	89	TR-HB 117	117	TR-HB 235	235
TR-HB 63	63	TR-HB 90	90	TR-HB 120	120	TR-HB 300	300
TR-HB 72	72	TR-HB 92	92	TR-HB 124	124	TR-HB 355	355
TR-HB 74	74	TR-HB 93	93	TR-HB 126	126	TR-HB 370	370
TR-HB 76	76	TR-HB 94	94	TR-HB 128	128	TR-HB 390	390
TR-HB 78	78	TR-HB 95	95	TR-HB 136	136	TR-HB 400	400
TR-HB 79	79	TR-HB 96	96	TR-HB 140	140	TR-HB 450	450
TR-HB 80	80	TR-HB 97	97	TR-HB 144	144	TR-HB 500	500
TR-HB 83	83	TR-HB 98	98	TR-HB 148	148	TR-HB 535	535
TR-HB 84	84	TR-HB 105	105	TR-HB 162	162	TR-HB 570	570
TR-HB 86	86	TR-HB 112	112	TR-HB 195	195	TR-HB 600	600

Inside length in inch

Intermediate sizes are available upon request




HC		HC		HC		HC	
Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length
TR-HC 47	47	TR-HC 126	126	TR-HC 168	168	TR-HC 385	385
TR-HC 68	68	TR-HC 128	128	TR-HC 180	180	TR-HC 400	400
TR-HC 75	75	TR-HC 132	132	TR-HC 190	190	TR-HC 415	415
TR-HC 80	80	TR-HC 136	136	TR-HC 195	195	TR-HC 435	435
TR-HC 90	90	TR-HC 140	140	TR-HC 210	210	TR-HC 475	475
TR-HC 94	94	TR-HC 142	142	TR-HC 225	225	TR-HC 500	500
TR-HC 98	98	TR-HC 146	146	TR-HC 238	238	TR-HC 550	550
TR-HC 108	108	TR-HC 148	148	TR-HC 240	240	TR-HC 600	600
TR-HC 110	110	TR-HC 150	150	TR-HC 285	285	TR-HC 625	625
TR-HC 114	114	TR-HC 154	154	TR-HC 300	300	TR-HC 645	645
TR-HC 120	120	TR-HC 158	158	TR-HC 360	360	TR-HC 660	660
TR-HC 124	124	TR-HC 160	160	TR-HC 375	375	TR-HC 690	690

Inside length in inch

Intermediate sizes are available upon request

PIX-Terminator®-HXS


Product range - Banded Belts



HSPA		HSPA		HSPA		HSPA	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-HSPA 1000	1000	TR-HSPA 1300	1300	TR-HSPA 1650	1650	TR-HSPA 2060	2060
TR-HSPA 1015	1015	TR-HSPA 1320	1320	TR-HSPA 1657	1657	TR-HSPA 2082	2082
TR-HSPA 1025	1025	TR-HSPA 1332	1332	TR-HSPA 1682	1682	TR-HSPA 2120	2120
TR-HSPA 1030	1030	TR-HSPA 1340	1340	TR-HSPA 1700	1700	TR-HSPA 2125	2125
TR-HSPA 1050	1050	TR-HSPA 1357	1357	TR-HSPA 1732	1732	TR-HSPA 2132	2132
TR-HSPA 1060	1060	TR-HSPA 1360	1360	TR-HSPA 1750	1750	TR-HSPA 2150	2150
TR-HSPA 1080	1080	TR-HSPA 1367	1367	TR-HSPA 1757	1757	TR-HSPA 2180	2180
TR-HSPA 1085	1085	TR-HSPA 1382	1382	TR-HSPA 1782	1782	TR-HSPA 2210	2210
TR-HSPA 1090	1090	TR-HSPA 1400	1400	TR-HSPA 1800	1800	TR-HSPA 2240	2240
TR-HSPA 1100	1100	TR-HSPA 1425	1425	TR-HSPA 1832	1832	TR-HSPA 2250	2250
TR-HSPA 1120	1120	TR-HSPA 1432	1432	TR-HSPA 1850	1850	TR-HSPA 2282	2282
TR-HSPA 1132	1132	TR-HSPA 1450	1450	TR-HSPA 1857	1857	TR-HSPA 2300	2300
TR-HSPA 1150	1150	TR-HSPA 1457	1457	TR-HSPA 1882	1882	TR-HSPA 2332	2332
TR-HSPA 1160	1160	TR-HSPA 1482	1482	TR-HSPA 1900	1900	TR-HSPA 2350	2350
TR-HSPA 1180	1180	TR-HSPA 1500	1500	TR-HSPA 1907	1907	TR-HSPA 2360	2360
TR-HSPA 1182	1182	TR-HSPA 1507	1507	TR-HSPA 1925	1925	TR-HSPA 2380	2380
TR-HSPA 1200	1200	TR-HSPA 1525	1525	TR-HSPA 1932	1932	TR-HSPA 2430	2430
TR-HSPA 1220	1220	TR-HSPA 1532	1532	TR-HSPA 1950	1950	TR-HSPA 2480	2480
TR-HSPA 1232	1232	TR-HSPA 1550	1550	TR-HSPA 1982	1982	TR-HSPA 2490	2490
TR-HSPA 1250	1250	TR-HSPA 1557	1557	TR-HSPA 1990	1990	TR-HSPA 2500	2500
TR-HSPA 1272	1272	TR-HSPA 1582	1582	TR-HSPA 2000	2000		
TR-HSPA 1280	1280	TR-HSPA 1600	1600	TR-HSPA 2032	2032		
TR-HSPA 1282	1282	TR-HSPA 1632	1632	TR-HSPA 2057	2057		

Pitch length in mm

Intermediate sizes are available upon request




HSPB		HSPB		HSPB		HSPB	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-HSPB 2100	2100	TR-HSPB 3350	3350	TR-HSPB 5000	5000	TR-HSPB 6700	6700
TR-HSPB 2240	2240	TR-HSPB 3400	3400	TR-HSPB 5120	5120	TR-HSPB 6845	6845
TR-HSPB 2300	2300	TR-HSPB 3500	3500	TR-HSPB 5300	5300	TR-HSPB 7000	7000
TR-HSPB 2310	2310	TR-HSPB 3550	3550	TR-HSPB 5265	5265	TR-HSPB 7115	7115
TR-HSPB 2360	2360	TR-HSPB 3670	3670	TR-HSPB 5500	5500	TR-HSPB 7250	7250
TR-HSPB 2500	2500	TR-HSPB 3750	3750	TR-HSPB 5600	5600	TR-HSPB 7440	7440
TR-HSPB 2650	2650	TR-HSPB 3800	3800	TR-HSPB 5665	5665	TR-HSPB 7500	7500
TR-HSPB 2800	2800	TR-HSPB 3900	3900	TR-HSPB 5750	5750	TR-HSPB 7580	7580
TR-HSPB 2840	2840	TR-HSPB 4000	4000	TR-HSPB 6000	6000	TR-HSPB 7620	7620
TR-HSPB 2855	2855	TR-HSPB 4010	4010	TR-HSPB 6300	6300	TR-HSPB 7750	7750
TR-HSPB 3000	3000	TR-HSPB 4200	4200	TR-HSPB 6375	6375	TR-HSPB 7830	7830
TR-HSPB 3080	3080	TR-HSPB 4250	4250	TR-HSPB 6390	6390	TR-HSPB 7905	7905
TR-HSPB 3150	3150	TR-HSPB 4400	4400	TR-HSPB 6430	6430	TR-HSPB 7965	7965
TR-HSPB 3170	3170	TR-HSPB 4500	4500	TR-HSPB 6500	6500	TR-HSPB 8000	8000
TR-HSPB 3250	3250	TR-HSPB 4820	4820	TR-HSPB 6685	6685		

Pitch length in mm

Intermediate sizes are available upon request

PIX-Terminator®-HXS


Product range - Banded Belts



HSPC		HSPC		HSPC		HSPC	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-HSPC 3000	3000	TR-HSPC 4250	4250	TR-HSPC 6250	6250	TR-HSPC 8750	8750
TR-HSPC 3015	3015	TR-HSPC 4400	4400	TR-HSPC 6300	6300	TR-HSPC 9000	9000
TR-HSPC 3100	3100	TR-HSPC 4500	4500	TR-HSPC 6600	6600	TR-HSPC 9135	9135
TR-HSPC 3180	3180	TR-HSPC 4600	4600	TR-HSPC 6700	6700	TR-HSPC 9250	9250
TR-HSPC 3200	3200	TR-HSPC 4750	4750	TR-HSPC 7000	7000	TR-HSPC 9500	9500
TR-HSPC 3250	3250	TR-HSPC 5000	5000	TR-HSPC 7100	7100	TR-HSPC 9750	9750
TR-HSPC 3350	3350	TR-HSPC 5300	5300	TR-HSPC 7250	7250	TR-HSPC 9825	9825
TR-HSPC 3460	3460	TR-HSPC 5500	5500	TR-HSPC 7500	7500	TR-HSPC 10000	10000
TR-HSPC 3500	3500	TR-HSPC 5525	5525	TR-HSPC 7740	7740	TR-HSPC 10250	10250
TR-HSPC 3540	3540	TR-HSPC 5550	5550	TR-HSPC 8000	8000	TR-HSPC 10500	10500
TR-HSPC 3690	3690	TR-HSPC 5600	5600	TR-HSPC 8125	8125	TR-HSPC 10650	10650
TR-HSPC 3750	3750	TR-HSPC 5700	5700	TR-HSPC 8230	8230	TR-HSPC 10750	10750
TR-HSPC 3735	3735	TR-HSPC 5950	5950	TR-HSPC 8245	8245	TR-HSPC 10855	10855
TR-HSPC 3810	3810	TR-HSPC 6000	6000	TR-HSPC 8355	8355	TR-HSPC 11000	11000
TR-HSPC 3970	3970	TR-HSPC 6035	6035	TR-HSPC 8460	8460	TR-HSPC 11200	11200
TR-HSPC 4000	4000	TR-HSPC 6155	6155	TR-HSPC 8500	8500		
TR-HSPC 4200	4200	TR-HSPC 6210	6210	TR-HSPC 8565	8565		

Pitch length in mm


Intermediate sizes are available upon request



H5V		H5V		H5V		H5V	
Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length
TR-H5V 1250	125	TR-H5V 2050	205	TR-H5V 3450	345	TR-H5V 4800	480
TR-H5V 1320	132	TR-H5V 2060	206	TR-H5V 3500	350	TR-H5V 4900	490
TR-H5V 1370	137	TR-H5V 2120	212	TR-H5V 3550	355	TR-H5V 5000	500
TR-H5V 1400	140	TR-H5V 2240	224	TR-H5V 3800	380	TR-H5V 5100	510
TR-H5V 1500	150	TR-H5V 2500	250	TR-H5V 3900	390	TR-H5V 5250	525
TR-H5V 1600	160	TR-H5V 2550	255	TR-H5V 4000	400	TR-H5V 5400	540
TR-H5V 1700	170	TR-H5V 2650	265	TR-H5V 4100	410	TR-H5V 5500	550
TR-H5V 1750	175	TR-H5V 2800	280	TR-H5V 4250	425	TR-H5V 5650	565
TR-H5V 1800	180	TR-H5V 2900	290	TR-H5V 4300	430	TR-H5V 5750	575
TR-H5V 1900	190	TR-H5V 3000	300	TR-H5V 4500	450	TR-H5V 5800	580
TR-H5V 1950	195	TR-H5V 3150	315	TR-H5V 4650	465	TR-H5V 5950	595
TR-H5V 2000	200	TR-H5V 3350	335	TR-H5V 4750	475	TR-H5V 6000	600

Outside length in Inches

Intermediate sizes are available upon request




H8V		H8V		H8V		H8V	
Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length
TR-H8V 1000	100	TR-H8V 2120	212	TR-H8V 3600	360	TR-H8V 4900	490
TR-H8V 1060	106	TR-H8V 2240	224	TR-H8V 3650	365	TR-H8V 5000	500
TR-H8V 1180	118	TR-H8V 2360	236	TR-H8V 3700	370	TR-H8V 5100	510
TR-H8V 1200	120	TR-H8V 2450	245	TR-H8V 3750	375	TR-H8V 5250	525
TR-H8V 1250	125	TR-H8V 2500	250	TR-H8V 3800	380	TR-H8V 5400	540
TR-H8V 1320	132	TR-H8V 2540	254	TR-H8V 3900	390	TR-H8V 5500	550
TR-H8V 1500	150	TR-H8V 2650	265	TR-H8V 4000	400	TR-H8V 5650	565
TR-H8V 1600	160	TR-H8V 2800	280	TR-H8V 4100	410	TR-H8V 5750	575
TR-H8V 1650	165	TR-H8V 2900	290	TR-H8V 4250	425	TR-H8V 5800	580
TR-H8V 1700	170	TR-H8V 3000	300	TR-H8V 4300	430	TR-H8V 5950	595
TR-H8V 1750	175	TR-H8V 3150	315	TR-H8V 4500	450	TR-H8V 6000	600
TR-H8V 1800	180	TR-H8V 3350	335	TR-H8V 4650	465		
TR-H8V 1900	190	TR-H8V 3450	345	TR-H8V 4740	474		
TR-H8V 2000	200	TR-H8V 3550	355	TR-H8V 4800	480		

Outside length in Inches

Intermediate sizes are available upon request

PIX-Terminator®-XS


Product range - Single Belts



A		A		A		A	
Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length
TR-A 40	40	TR-A 56	56	TR-A 72	72	TR-A 88	88
TR-A 41	41	TR-A 57	57	TR-A 73	73	TR-A 89	89
TR-A 42	42	TR-A 58	58	TR-A 74	74	TR-A 90	90
TR-A 43	43	TR-A 59	59	TR-A 75	75	TR-A 91	91
TR-A 44	44	TR-A 60	60	TR-A 76	76	TR-A 92	92
TR-A 45	45	TR-A 61	61	TR-A 77	77	TR-A 93	93
TR-A 46	46	TR-A 62	62	TR-A 78	78	TR-A 94	94
TR-A 47	47	TR-A 63	63	TR-A 79	79	TR-A 95	95
TR-A 48	48	TR-A 64	64	TR-A 80	80	TR-A 96	96
TR-A 49	49	TR-A 65	65	TR-A 81	81	TR-A 97	97
TR-A 50	50	TR-A 66	66	TR-A 82	82	TR-A 98	98
TR-A 51	51	TR-A 67	67	TR-A 83	83	TR-A 99	99
TR-A 52	52	TR-A 68	68	TR-A 84	84	TR-A 100	100
TR-A 53	53	TR-A 69	69	TR-A 85	85		
TR-A 54	54	TR-A 70	70	TR-A 86	86		
TR-A 55	55	TR-A 71	71	TR-A 87	87		

Inside length in inch

Intermediate sizes are available upon request




B		B		B		B	
Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length
TR-B 80	80	TR-B 109	109	TR-B 142	142	TR-B 184	184
TR-B 81	81	TR-B 110	110	TR-B 143	143	TR-B 185	185
TR-B 82	82	TR-B 111	111	TR-B 144	144	TR-B 186	186
TR-B 83	83	TR-B 113	113	TR-B 145	145	TR-B 189	189
TR-B 84	84	TR-B 114	114	TR-B 146	146	TR-B 190	190
TR-B 85	85	TR-B 115	115	TR-B 147	147	TR-B 191	191
TR-B 86	86	TR-B 116	116	TR-B 148	148	TR-B 192	192
TR-B 87	87	TR-B 117	117	TR-B 150	150	TR-B 195	195
TR-B 88	88	TR-B 118	118	TR-B 151	151	TR-B 196	196
TR-B 89	89	TR-B 119	119	TR-B 152	152	TR-B 197	197
TR-B 90	90	TR-B 120	120	TR-B 154	154	TR-B 200	200
TR-B 91	91	TR-B 121	121	TR-B 155	155	TR-B 204	204
TR-B 92	92	TR-B 122	122	TR-B 156	156	TR-B 208	208
TR-B 93	93	TR-B 123	123	TR-B 158	158	TR-B 210	210
TR-B 94	94	TR-B 124	124	TR-B 160	160	TR-B 216	216
TR-B 95	95	TR-B 125	125	TR-B 162	162	TR-B 220	220
TR-B 96	96	TR-B 126	126	TR-B 163	163	TR-B 224	224
TR-B 97	97	TR-B 127	127	TR-B 164	164	TR-B 225	225
TR-B 98	98	TR-B 128	128	TR-B 165	165	TR-B 226	226
TR-B 99	99	TR-B 129	129	TR-B 167	167	TR-B 228	228
TR-B 100	100	TR-B 130	130	TR-B 168	168	TR-B 235	235
TR-B 101	101	TR-B 131	131	TR-B 170	170	TR-B 236	236
TR-B 102	102	TR-B 132	132	TR-B 172	172	TR-B 238	238
TR-B 103	103	TR-B 133	133	TR-B 173	173	TR-B 240	240
TR-B 104	104	TR-B 134	134	TR-B 175	175	TR-B 248	248
TR-B 105	105	TR-B 135	135	TR-B 177	177	TR-B 280	280
TR-B 106	106	TR-B 136	136	TR-B 178	178	TR-B 300	300
TR-B 107	107	TR-B 138	138	TR-B 180	180		
TR-B 108	108	TR-B 140	140	TR-B 182	182		

Inside length in inch

Intermediate sizes are available upon request

PIX-Terminator®-XS


Product range - Single Belts



C		C		C		C	
Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length
TR-C 80	80	TR-C 109	109	TR-C 147	147	TR-C 210	210
TR-C 81	81	TR-C 110	110	TR-C 148	148	TR-C 215	215
TR-C 82	82	TR-C 115	115	TR-C 150	150	TR-C 216	216
TR-C 83	83	TR-C 116	116	TR-C 152	152	TR-C 220	220
TR-C 84	84	TR-C 117	117	TR-C 153	153	TR-C 225	225
TR-C 85	85	TR-C 118	118	TR-C 154	154	TR-C 228	228
TR-C 86	86	TR-C 119	119	TR-C 157	157	TR-C 232	232
TR-C 87	87	TR-C 120	120	TR-C 158	158	TR-C 238	238
TR-C 88	88	TR-C 122	122	TR-C 160	160	TR-C 240	240
TR-C 89	89	TR-C 124	124	TR-C 161	161	TR-C 244	244
TR-C 90	90	TR-C 125	125	TR-C 162	162	TR-C 248	248
TR-C 91	91	TR-C 126	126	TR-C 164	164	TR-C 250	250
TR-C 92	92	TR-C 127	127	TR-C 165	165	TR-C 255	255
TR-C 93	93	TR-C 128	128	TR-C 168	168	TR-C 260	260
TR-C 94	94	TR-C 130	130	TR-C 170	170	TR-C 265	265
TR-C 95	95	TR-C 131	131	TR-C 180	180	TR-C 270	270
TR-C 96	96	TR-C 132	132	TR-C 182	182	TR-C 276	276
TR-C 97	97	TR-C 134	134	TR-C 184	184	TR-C 280	280
TR-C 98	98	TR-C 135	135	TR-C 185	185	TR-C 285	285
TR-C 99	99	TR-C 136	136	TR-C 187	187	TR-C 294	294
TR-C 100	100	TR-C 138	138	TR-C 188	188	TR-C 295	295
TR-C 101	101	TR-C 139	139	TR-C 190	190	TR-C 300	300
TR-C 102	102	TR-C 140	140	TR-C 192	192	TR-C 315	315
TR-C 103	103	TR-C 142	142	TR-C 195	195	TR-C 360	360
TR-C 104	104	TR-C 144	144	TR-C 200	200	TR-C 395	395
TR-C 105	105	TR-C 145	145	TR-C 205	205	TR-C 400	400
TR-C 108	108	TR-C 146	146	TR-C 208	208		

Inside length in inch

Intermediate sizes are available upon request




SPA		SPA		SPA		SPA	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-SPA 1000	1000	TR-SPA 1320	1320	TR-SPA 1657	1657	TR-SPA 2082	2082
TR-SPA 1025	1025	TR-SPA 1332	1332	TR-SPA 1682	1682	TR-SPA 2120	2120
TR-SPA 1030	1030	TR-SPA 1340	1340	TR-SPA 1700	1700	TR-SPA 2125	2125
TR-SPA 1050	1050	TR-SPA 1357	1357	TR-SPA 1732	1732	TR-SPA 2132	2132
TR-SPA 1060	1060	TR-SPA 1360	1360	TR-SPA 1750	1750	TR-SPA 2150	2150
TR-SPA 1080	1080	TR-SPA 1367	1367	TR-SPA 1757	1757	TR-SPA 2180	2180
TR-SPA 1085	1085	TR-SPA 1382	1382	TR-SPA 1782	1782	TR-SPA 2210	2210
TR-SPA 1090	1090	TR-SPA 1400	1400	TR-SPA 1800	1800	TR-SPA 2240	2240
TR-SPA 1100	1100	TR-SPA 1425	1425	TR-SPA 1832	1832	TR-SPA 2250	2250
TR-SPA 1120	1120	TR-SPA 1432	1432	TR-SPA 1850	1850	TR-SPA 2282	2282
TR-SPA 1132	1132	TR-SPA 1450	1450	TR-SPA 1857	1857	TR-SPA 2300	2300
TR-SPA 1150	1150	TR-SPA 1457	1457	TR-SPA 1882	1882	TR-SPA 2332	2332
TR-SPA 1160	1160	TR-SPA 1482	1482	TR-SPA 1900	1900	TR-SPA 2350	2350
TR-SPA 1180	1180	TR-SPA 1500	1500	TR-SPA 1907	1907	TR-SPA 2360	2360
TR-SPA 1182	1182	TR-SPA 1507	1507	TR-SPA 1925	1925	TR-SPA 2380	2380
TR-SPA 1200	1200	TR-SPA 1525	1525	TR-SPA 1932	1932	TR-SPA 2430	2430
TR-SPA 1220	1220	TR-SPA 1532	1532	TR-SPA 1950	1950	TR-SPA 2480	2480
TR-SPA 1232	1232	TR-SPA 1550	1550	TR-SPA 1982	1982	TR-SPA 2490	2490
TR-SPA 1250	1250	TR-SPA 1557	1557	TR-SPA 1990	1990	TR-SPA 2500	2500
TR-SPA 1272	1272	TR-SPA 1582	1582	TR-SPA 2000	2000	TR-SPA 2530	2530
TR-SPA 1280	1280	TR-SPA 1600	1600	TR-SPA 2032	2032	TR-SPA 2540	2540
TR-SPA 1282	1282	TR-SPA 1632	1632	TR-SPA 2057	2057		
TR-SPA 1300	1300	TR-SPA 1650	1650	TR-SPA 2060	2060		

Pitch length in mm

Intermediate sizes are available upon request

PIX-Terminator®-XS


Product range - Single Belts



SPB		SPB		SPB		SPB	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-SPB 1600	1600	TR-SPB 2800	2800	TR-SPB 4250	4250	TR-SPB 6700	6700
TR-SPB 1680	1680	TR-SPB 2840	2840	TR-SPB 4400	4400	TR-SPB 6845	6845
TR-SPB 1700	1700	TR-SPB 2855	2855	TR-SPB 4500	4500	TR-SPB 7000	7000
TR-SPB 1840	1840	TR-SPB 3000	3000	TR-SPB 4820	4820	TR-SPB 7115	7115
TR-SPB 1865	1865	TR-SPB 3080	3080	TR-SPB 5000	5000	TR-SPB 7250	7250
TR-SPB 1895	1895	TR-SPB 3150	3150	TR-SPB 5120	5120	TR-SPB 7440	7440
TR-SPB 1900	1900	TR-SPB 3170	3170	TR-SPB 5300	5300	TR-SPB 7500	7500
TR-SPB 1935	1935	TR-SPB 3250	3250	TR-SPB 5265	5265	TR-SPB 7580	7580
TR-SPB 1955	1955	TR-SPB 3350	3350	TR-SPB 5500	5500	TR-SPB 7620	7620
TR-SPB 1975	1975	TR-SPB 3400	3400	TR-SPB 5600	5600	TR-SPB 7750	7750
TR-SPB 2000	2000	TR-SPB 3500	3500	TR-SPB 5665	5665	TR-SPB 7830	7830
TR-SPB 2150	2150	TR-SPB 3550	3550	TR-SPB 5750	5750	TR-SPB 7905	7905
TR-SPB 2100	2100	TR-SPB 3670	3670	TR-SPB 6000	6000	TR-SPB 7965	7965
TR-SPB 2240	2240	TR-SPB 3750	3750	TR-SPB 6300	6300	TR-SPB 8000	8000
TR-SPB 2300	2300	TR-SPB 3800	3800	TR-SPB 6375	6375		
TR-SPB 2310	2310	TR-SPB 3900	3900	TR-SPB 6390	6390		
TR-SPB 2360	2360	TR-SPB 4000	4000	TR-SPB 6430	6430		
TR-SPB 2500	2500	TR-SPB 4010	4010	TR-SPB 6500	6500		
TR-SPB 2650	2650	TR-SPB 4200	4200	TR-SPB 6685	6685		

Pitch length in mm

Intermediate sizes are available upon request




SPC		SPC		SPC		SPC	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-SPC 2000	2000	TR-SPC 2850	2850	TR-SPC 4400	4400	TR-SPC 7500	7500
TR-SPC 2150	2150	TR-SPC 2900	2900	TR-SPC 4500	4500	TR-SPC 7740	7740
TR-SPC 2185	2185	TR-SPC 2945	2945	TR-SPC 4600	4600	TR-SPC 8000	8000
TR-SPC 2200	2200	TR-SPC 2965	2965	TR-SPC 4750	4750	TR-SPC 8125	8125
TR-SPC 2215	2215	TR-SPC 2985	2985	TR-SPC 5000	5000	TR-SPC 8230	8230
TR-SPC 2275	2275	TR-SPC 3000	3000	TR-SPC 5300	5300	TR-SPC 8245	8245
TR-SPC 2300	2300	TR-SPC 3015	3015	TR-SPC 5500	5500	TR-SPC 8355	8355
TR-SPC 2335	2335	TR-SPC 3100	3100	TR-SPC 5525	5525	TR-SPC 8460	8460
TR-SPC 2350	2350	TR-SPC 3180	3180	TR-SPC 5550	5550	TR-SPC 8500	8500
TR-SPC 2364	2364	TR-SPC 3200	3200	TR-SPC 5600	5600	TR-SPC 8565	8565
TR-SPC 2400	2400	TR-SPC 3250	3250	TR-SPC 5700	5700	TR-SPC 8750	8750
TR-SPC 2420	2420	TR-SPC 3350	3350	TR-SPC 5950	5950	TR-SPC 9000	9000
TR-SPC 2460	2460	TR-SPC 3460	3460	TR-SPC 6000	6000	TR-SPC 9135	9135
TR-SPC 2475	2475	TR-SPC 3500	3500	TR-SPC 6035	6035	TR-SPC 9250	9250
TR-SPC 2490	2490	TR-SPC 3540	3540	TR-SPC 6155	6155	TR-SPC 9500	9500
TR-SPC 2500	2500	TR-SPC 3690	3690	TR-SPC 6210	6210	TR-SPC 9750	9750
TR-SPC 2515	2515	TR-SPC 3750	3750	TR-SPC 6250	6250	TR-SPC 9825	9825
TR-SPC 2545	2545	TR-SPC 3735	3735	TR-SPC 6300	6300	TR-SPC 10000	10000
TR-SPC 2585	2585	TR-SPC 3810	3810	TR-SPC 6600	6600		
TR-SPC 2600	2600	TR-SPC 3970	3970	TR-SPC 6700	6700		
TR-SPC 2625	2625	TR-SPC 4000	4000	TR-SPC 7000	7000		
TR-SPC 2675	2675	TR-SPC 4200	4200	TR-SPC 7100	7100		
TR-SPC 2700	2700	TR-SPC 4250	4250	TR-SPC 7250	7250		

Pitch length in mm

Intermediate sizes are available upon request

PIX-Terminator®-XS


Product range - Single Belts



3V		3V		3V		3V	
Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length
TR-3V 450	45	TR-3V 630	63	TR-3V 900	90	TR-3V 1250	125
TR-3V 475	47.5	TR-3V 670	67	TR-3V 950	95	TR-3V 1320	132
TR-3V 500	50	TR-3V 710	71	TR-3V 1000	100	TR-3V 1400	140
TR-3V 530	53	TR-3V 750	75	TR-3V 1060	106	TR-3V 1500	150
TR-3V 560	56	TR-3V 800	80	TR-3V 1120	112		
TR-3V 600	60	TR-3V 850	85	TR-3V 1180	118		

Outside length in Inches


Intermediate sizes are available upon request



5V		5V		5V		5V	
Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length
TR-5V 800	80	TR-5V 1250	125	TR-5V 2000	200	TR-5V 3150	315
TR-5V 850	85	TR-5V 1320	132	TR-5V 2120	212	TR-5V 3350	335
TR-5V 900	90	TR-5V 1400	140	TR-5V 2240	224	TR-5V 3550	355
TR-5V 950	95	TR-5V 1500	150	TR-5V 2360	236	TR-5V 3750	375
TR-5V 1000	100	TR-5V 1600	160	TR-5V 2500	250	TR-5V 3800	380
TR-5V 1060	106	TR-5V 1700	170	TR-5V 2650	265	TR-5V 3900	390
TR-5V 1120	112	TR-5V 1800	180	TR-5V 2800	280	TR-5V 4000	400
TR-5V 1180	118	TR-5V 1900	190	TR-5V 3000	300		

Outside length in Inches

Intermediate sizes are available upon request



8V		8V		8V		8V	
Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length
TR-8V 1500	150	TR-8V 2120	212	TR-8V 3000	300	TR-8V 4050	405
TR-8V 1600	160	TR-8V 2240	224	TR-8V 3150	315	TR-8V 4500	450
TR-8V 1700	170	TR-8V 2360	236	TR-8V 3350	335	TR-8V 5000	500
TR-8V 1800	180	TR-8V 2500	250	TR-8V 3550	355	TR-8V 5500	550
TR-8V 1900	190	TR-8V 2650	265	TR-8V 3750	375	TR-8V 6000	600
TR-8V 2000	200	TR-8V 2800	280	TR-8V 4000	400		

Outside length in Inches

Intermediate sizes are available upon request



PIX Group of Companies

Nagpur & Mumbai, India | Paderborn, Germany
Ipswich, U.K. | Dubai & Ras-Al-Khaimah, U.A.E.

